



## DOUBLE WALL TANKS UP TO 100m<sup>3</sup> FOR PRIVATE USER



## DOUBLE WALL TANKS UP TO 100m <sup>3</sup> FOR PRIVATE USER



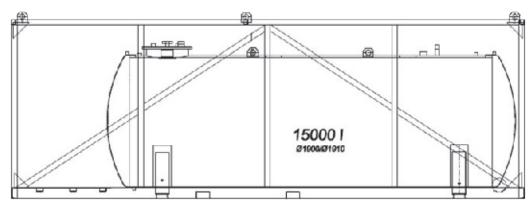

- > Double wall construction in comply with latest international standards and regulation
- > Inspection hole DN 600 (stainless steel INOX) with gasket
- > Piping and nozzles in the tank are made of stainless steel INOX
- > Internal tank carbon steel S235JRG2 acc. to PN-EN 10025-2
- > External tank carbon steel S235JRG2 acc. to PN-EN 10025-2
- > Suction pipe equipped with a check valve with strainer
- > Suction pipe for residual fuel, water and impurities in the clarifier
- > VRS tip of flame arrester and check valve to the vapor
- > Leak monitoring system
- > Overfill prevention system
- > Full support of the tank
- > Side ladder
- > Suction outlet from the tank to the distributor
- > Lifting and earthing handles
- > Warranty for the tank surface 60 months
- > Interior of the tank secured by a special multi-layer polymerepoxy paint, approved for aviation fuels
- > Exterior tank painted by a special paint resistant to aviation fuel

## AVIATION FUEL DISPENSER FOR INTERNAL USE WITH THE EQUIPMENT:

- Distribution set AV-ASG80/230V, pump the EX-performance, flow-rate 80 I / min, gas-tight mechanical meter, automatic nozzle
- > Technological pipeline from tank to distributor with stainless INOX valves
- > Locked distribution box
- > Automatic grounding reel, 16m copper cable with clamp
- > Fuel hose certified for aviation fuel 15 m, both sides provided with a tip
- > Automatic hose reel for 15 m hose (with spring)
- > Two-stage aviation fuel filter type EN-VF-250

eN-TANK Sp. J. ul. Geodetów 1 Street 64-100 Leszno POLAND









+48 607 747 011 +48 603 747 917 en-tank@en-tank.pl