Access Control Temperature Monitoring

Face Recognition/Temperature Monitoring/Integration

Liveness Detection

WDR Camera

2.5D Curved Screen

Anti-glare Interference

Large Capacity

Accurate Temperature Measurement

Mask Recognition

Fast Recognition Speed

Abnormal Temperature Alarm

Temperature Monitoring
Distance: 0.3m - 0.7m

Temperature
Accuracy: ± 0.3°C

Temperature
Abnormal Alarm

Large Storage
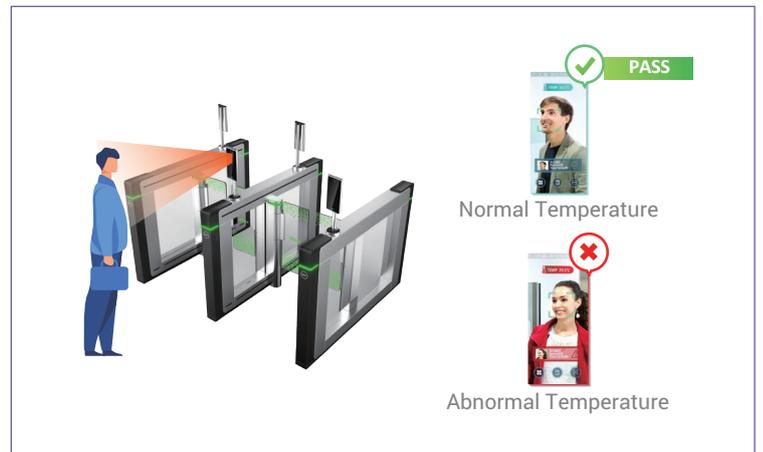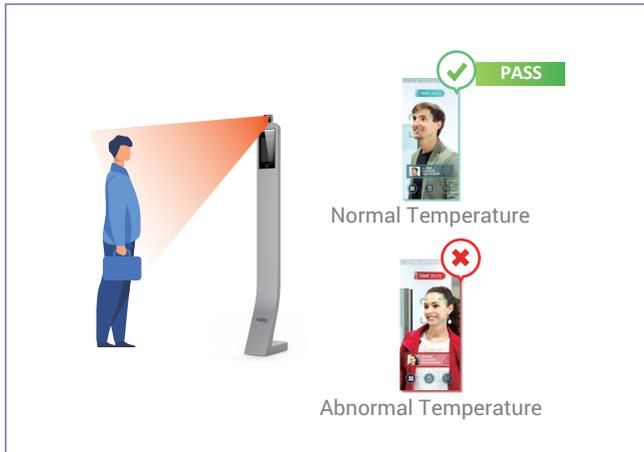Capacity

Key Features

PASS
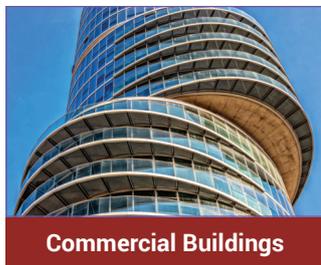
Normal Temperature

Abnormal Temperature

PASS

Normal Temperature

Abnormal Temperature

- Face recognition is integrated with body temperature monitoring, no additional staff required.
- Non-contact access to reduce cross-infection.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.

Application Scenario

Commercial Buildings

Hospitals

Sports Venues & Arenas

Factories

Products

* Design and specifications are subject to change without notice.

DHI-ASI7213X-T/ DSS-Express

- Temperature Accuracy: ±0.3°C
- Temperature Monitoring Distance: 0.3m ~ 0.7m
- Sound Prompt: Abnormal temperature alarm

DHI-ASI7223X-A-T/ DHI-ASGB8xxX/DSS-Express

- Temperature Accuracy: ±0.3°C
- Temperature Monitoring Distance: 0.3m ~ 0.7m
- Sound Prompt: Abnormal temperature alarm

DHI-ASI7213X-T/ ASF172X/DSS-Express

- Temperature Accuracy: ±0.3°C
- Temperature Monitoring Distance: 0.3m~0.7m
- Sound Prompt: Abnormal temperature alarm

York Road, Bridgend Industrial Estate, Bridgend, United Kingdom, CF31 3TB
01656 674488 / llebrocq@romamedical.co.uk / romamedical.co.uk