

## Bottom loading coupler F228




### 01 Bottom loading coupler F228

The Meggitt 4-inch bottom loading coupler is designed in accordance with API RP1004.

#### NOTES:

1. Modification A, K & N may be added to the basic F228 and all other modifications
2. Modification C may be used in conjunction with all other modifications
3. Modifications D, F, & G are separate modifications and cannot be combined with each other

#### F228 Dimensions

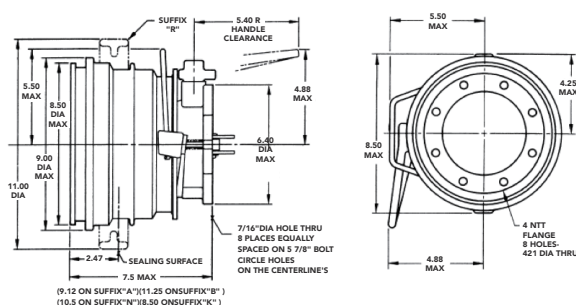

### 02 Key Features

- Push-on, pull-off, one-hand operation no rotation, no slots
- Fully interlocked - can't be opened unless locked and can't be removed unless closed
- Minimum disconnect spillage with dual seals within API specs
- Floating nose seal provides positive seal under operating conditions
- Dust protection sleeve seal
- Full flow 4-inch design - 4.7 PSI pressure drop thru F228/F433 at 1000 gpm
- Lightweight design - 13.6 pounds
- 4-inch NTT flanged inlet standard, other options available as listed below
- Mates adapters made to API PR1004
- Standard seals recommended for all commercial automotive and aircraft fuels, Viton seals available
- Meggitt 4-inch swivels available as modifications
- Operating pressure - 120 PSI maximum, 350 PSI peak surge

### 03 Contact

HP Aviation Group

Address: 1/9 Newry Drive, New Gisborne, 3438, Australia

Email: [sales@hpaviationhoses.com.au](mailto:sales@hpaviationhoses.com.au)

Telephone: +61 35428 4846, +61 400 234 997

Website: [www.hpaviationhoses.com.au](http://www.hpaviationhoses.com.au)