

Fuelling products

Couplings


1 1/2 and 2-inch stainless steel self sealing coupling

Specification

5 - TANK UNIT CCMY 8155 FLANGED VERSION

Material	316 stainless steel
Weight	3.59 kg
Max. working pressure	300 psi
Max. coupling pressure	60 psi

Flanged tank units can be drilled to customer requirements on request

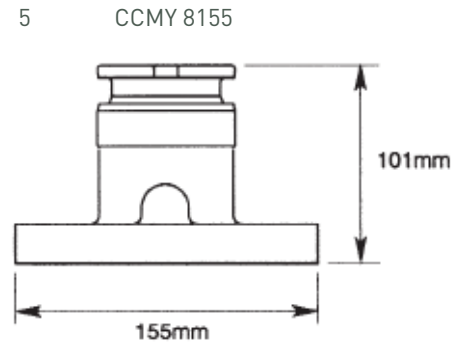

6 - DUST CAP FOR HOSE UNIT CCMY 324

Material	Synthetic rubber
----------	------------------



7 - DUST CAP FOR TANK UNIT CCMY 4

Material	Gunmetal
----------	----------



Meggitt Control Systems

Our product competencies & services:
Aerospace valves | Thermal management solutions | Environmental control systems | Electro-mechanical products
Ground fuelling products | Energy products | Aftermarket services

MEGGITT
smart engineering for
extreme environments

Fuelling products

Coupling

1 1/2 and 2-inch stainless steel self sealing coupling

Specification


Seals

Hose and tank units are available with a choice of seals:

Seal Material	Pt. No. suffix
Viton	V
Nitrile	N
Chemraz	C
E.P.	E

PRESSURE DROP


Meggitt cam-operated couplings have exceptional low pressure loss characteristics

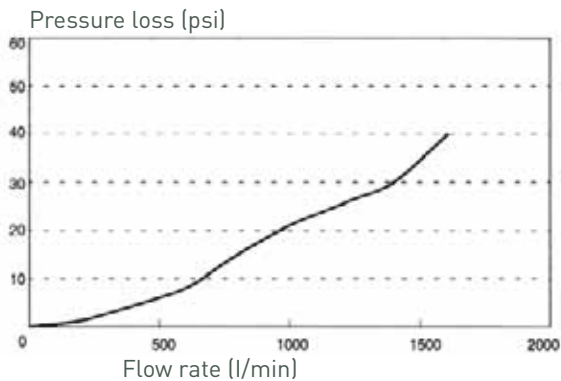

SELECTIVITY

Each unit has seven possible selective positions designated alphabetically from -ST to -SZ

Selective Position Letter	T	U	V	W	X	Y	Z
Pin & Slot Position	as shown						

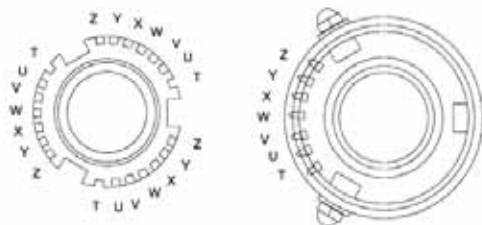

Contact

HP Aviation Group

Address: 1/9 Newry Drive,
New Gisborne, 3438,
Australia

Telephone: +61 35428 4846
+61 400 234 997

Email:
sales@hpaviationhoses.com.au

Website:
www.hpaviationhoses.com.au

Meggitt Control Systems

Our product competencies & services:

Aerospace valves | Thermal management solutions | Environmental control systems | Electro-mechanical products
Ground fuelling products | Energy products | Aftermarket services

MEGGITT
smart engineering for
extreme environments